



**CTS (NINGBO) TESTING SERVICE TECHNOLOGY  
INTERNATIONAL**

**OPERATE ACCORDING TO ISO/IEC 17025**

# **EMC TEST REPORT**

**TEST REPORT NUMBER : CGZ3131008-00903-EE**



**CTS (Ningbo) Testing Service Technology Co., Ltd.**  
2/F., South Tower, Huoju Building, No.181, Canghai Road,  
Jiangdong Science and Technology Park, Ningbo, Zhejiang, China



<b>TEST REPORT</b>	
<b>ETSI EN 301 489-1 V1.9.2 and ETSI EN 301 489-3 V1.4.1</b>	
Electromagnetic compatibility and Radio spectrum matters(ERM); ElectroMagnetic Compatibility(EMC) Standard for radio equipment and services Part 1: Common technical requirements Part 3: Specific conditions for Short-Range Devices(SRD)operation frequencies between 9kHz and 40GHz	
<b>Report Reference No.</b> .....	CGZ3131008-00903-EE
<b>Date of issue</b> .....	10 October 2013
<b>Testing Laboratory Name</b> .....	<b>CTS (Ningbo) Testing Service Technology Co., Ltd.</b>
<b>Address</b> .....	GZ test site: A101, No.65, Zhuji Road, Tianhe District, Guangzhou, Guangdong, China.
<b>Testing location/ procedure</b> .....	Full application of Harmonised standards <input checked="" type="checkbox"/> Partial application of Harmonised standards <input type="checkbox"/> Other standard testing method <input type="checkbox"/>
<b>Applicant's name</b> .....	Sherlotronics SA (Pty) Ltd.
<b>Address</b> .....	251 Aintree Rd, Northriding, Johannesburg, South Africa
<b>Test specification:</b>	
<b>Standard</b> .....	<b>ETSI EN 301 489-1 V1.9.2, ETSI EN 301 489-3 V1.4.1</b>
<b>Test Report Form No.</b> .....	CTSEMC-1.0
<b>TRF Originator</b> .....	CTS (Ningbo) Testing Service Technology Co., Ltd.
<b>Master TRF</b> .....	Dated 2009-01
<b>CTS (Ningbo) Testing Service Technology Co., Ltd. All rights reserved.</b>	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the CTS (Ningbo) Testing Service Technology Co., Ltd. is acknowledged as copyright owner and source of the material. CTS (Ningbo) Testing Service Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
<b>Test item description.</b> .....	Wall Mount Remote
<b>Trade Mark</b> .....	/
<b>Manufacturer</b> .....	Sherlotronics SA (Pty) Ltd.
<b>Model/Type reference</b> .....	WMTX
<b>Ratings</b> .....	Battery 3V
<b>Result</b> .....	<b>PASSED</b>

Compiled by:

Kate zhang / File administrators

Supervised by:

Duke yang / Technique principal

Approved by:

Vincent yao / Manager

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company

**CTS (Ningbo) Testing Service Technology Co., Ltd.**

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



## EMC -- TEST REPORT

<b>Test Report No. :</b> CGZ3131008-00903-EE	<u>10 October 2013</u> Date of issue
--	---

Type / Model.....	WMTX
EUT.....	Wall Mount Remote
<b>Applicant</b> .....	Sherlotronics SA (Pty) Ltd.
Address.....	251 Aintree Rd, Northriding, Johannesburg, South Africa
Telephone.....	+011-4625101
Fax.....	+11-4628177
Contact.....	Simon Knott
<b>Manufacturer</b> .....	Sherlotronics SA (Pty) Ltd.
Address.....	251 Aintree Rd, Northriding, Johannesburg, South Africa
Telephone.....	+011-4625101
Fax.....	+11-4628177
Contact.....	Simon Knott
<b>Factory</b> .....	Sherlotronics SA (Pty) Ltd.
Address.....	251 Aintree Rd, Northriding, Johannesburg, South Africa
Telephone.....	+011-4625101
Fax.....	+11-4628177
Contact.....	Simon Knott

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

**CTS (Ningbo) Testing Service Technology Co., Ltd.**

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

## TABLE OF CONTENTS

Description	Page
1 TEST STANDARDS.....	4
2 SUMMARY .....	4
2.1 GENERAL REMARKS .....	4
2.2 FINAL ASSESSMENT.....	4
3 EQUIPMENT UNDER TEST .....	5
3.1 Power supply system utilised.....	5
3.2 Short description of the Equipment under Test (EUT).....	5
3.3 EUT operation mode .....	5
3.4 EUT configuration .....	6
3.5 Performance level .....	6
3.6 Definition related to the performance level .....	6
4 TEST ENVIRONMENT .....	7
4.1 Address of the test laboratory .....	7
4.2 Test facility.....	7
4.3 Environmental conditions .....	7
4.4 Definitions of symbols used in this test report.....	7
4.5 Statement of the measurement uncertainty .....	7
4.6 Measurement Uncertainty .....	8
4.7 Test Description .....	8
5 TEST CONDITIONS AND RESULTS .....	9
5.1 Radiated disturbance (electric field).....	9
5.2 Electrostatic discharge.....	15
5.3 Radiated, radio-frequency, electromagnetic field .....	17
6 USED TEST EQUIPMENT.....	19
7 TEST PHOTOGRAPHS.....	20
7.1. Photo of radiated emission measurement (R.E. Electric field) .....	20
7.2. Photo of electrostatic discharge Immunity measurement (E.S.D.).....	20
7.3. Photo of RF field strength Immunity measurement (R.S.).....	21
8 External and Internal Photos of the EUT .....	22
9 Manufacturer/ Approval holder Declaration .....	26

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

**CTS (Ningbo) Testing Service Technology Co., Ltd.**

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

## 1 TEST STANDARDS

The tests were performed according to following standards:

[ETSI EN 301 489-1 V1.9.2](#) and [ETSI EN 301 489-3 V1.4.1](#) Electromagnetic compatibility and Radio spectrum matters(ERM); ElectroMagnetic Compatibility(EMC)Standard for radio equipment and services.

Part 1: Common technical requirements

Part 3: Specific conditions for Short-Range Devices(SRD)operation frequencies between 9kHz and 40GHz

## 2 SUMMARY

### 2.1 GENERAL REMARKS

Date of receipt of test sample	09 October 2013
Testing commenced on	09~10 October 2013
Testing concluded on	10 October 2013

### 2.2 FINAL ASSESSMENT

The EMC requirements pertaining to the technical standards and tested operation modes are

- fulfilled.

- **not** fulfilled.

The equipment under test

- fulfils the EMC requirements cited on page 1.

- **does not** fulfil the EMC requirements cited on page 1.

### 3 EQUIPMENT UNDER TEST

#### 3.1 Power supply system utilised

Power supply voltage:  Battery 3V  
 Others

#### 3.2 Short description of the Equipment under Test (EUT)

Number of tested samples: 1  
Serial number: Prototype

#### 3.3 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

- Normal

**Operating Mode:** Normal

Emissions tests.....: According to ETSI EN 301 489-1 V1.9.2 and ETSI EN301 489-3 V1.4.1, searching for the highest disturbance.

Immunity tests .....: According to ETSI EN 301 489-1 V1.9.2 and ETSI EN301 489-3 V1.4.1, searching for the highest susceptibility.

### 3.4 EUT configuration

(The CDF filled by the applicant can be viewed at the test laboratory.)

The following peripheral devices and interface cables were connected during the measurement:

Not Applicable

### 3.5 Performance level

The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance level defined by its manufacturer or the requestor of the test, or agreed between the manufacturer and the purchaser of the product.

### 3.6 Definition related to the performance level

Performance table for EN 301 489-3 (V 1.4.1)		
Criteria	During test	After test
A	Shall operate as intended. May show degradation of performance (see note 1). Shall be no loss of function . Shall be no unintentional transmissions.	Shall operate as intended . Shall be no degradation of performance (see note 2) Shall be no loss of function . Shall be no loss of stored data or user programmable Functions.
B	May show loss of function (one or more) .. May show degradation of performance (see note 1). No unintentional transmissions.	Functions shall be self-recoverable . Shall operate as intended after recovering . Shall be no degradation of performance (see note 2). Shall be no loss of stored data or user programmable functions.
C	May be loss of function (one or more).	Functions shall be recoverable by the operator . Shall operate as intended after recovering . Shall be no degradation of performance (see note 2).

NOTE 1: Degradation of performance during the test is understood as a degradation to a level not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance.

If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

NOTE 2: No degradation of performance after the test is understood as no degradation below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. After the test no change of actual operating data or user retrievable data is allowed.

If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

#### CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

## 4 TEST ENVIRONMENT

### 4.1 Address of the test laboratory

GZ test site: A101, No.65, Zhuji Road, Tianhe District, Guangzhou, Guangdong, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

### 4.2 Test facility

The test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-Lab Code: L3394**

CTS (Ningbo) Testing Service Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### **IC-Registration No.: 8374A**

The 3m Alternate Test Site of CTS (Ningbo) Testing Service Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 8374A on June 06, 2011 .

#### **FCC-Registration No.: 971995**

CTS (Ningbo) Testing Service Technology Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration No.971995, July 13, 2012.

### 4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35 ° C
Humidity:	25~75 %
Atmospheric pressure:	86~106 kPa

### 4.4 Definitions of symbols used in this test report

- - The black square indicates that the listed condition, standard or equipment is applicable for this report.
- - The empty square indicates that the listed condition, standard or equipment is **not** applicable for this report.

### 4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the CTS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

#### **CTS (Ningbo) Testing Service Technology Co., Ltd.**

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



#### 4.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±1.22dB	(1)
Power disturbance	30MHz~300MHz	±1.38dB	(1)
Radiation emission (3m)	30MHz~300MHz	±3.14dB	(1)
	300MHz~1000MHz	±3.18dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

(2) The actual EUT tested items in this test report, only applies to this "measurement uncertainty" in part / all of the corresponding data.

#### 4.7 Test Description

##### 4.7.1 Description of Standards and Results

EMISSION(ETSI EN 301 489-1 V1.9.2 and ETSI EN301 489-3 V1.4.1)			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	EN 55022:2006+A1:2007	Class B	N/A
Conducted disturbance at telecommunication port	EN 55022:2006+A1:2007	Class B	N/A
Radiated disturbance	EN 55022:2006+A1:2007	Class B	PASS
Harmonic current emissions	EN 61000-3-2:2006+A2:2009	Class A	N/A
Voltage fluctuations & flicker	EN 61000-3-3:2008	-----	N/A
IMMUNITY (ETSI EN 301 489-1 V1.9.2 and ETSI EN301 489-3 V1.4.1)			
Description of Test Item	Basic Standard	Performance Criteria	Results
Electrostatic discharge (ESD)	IEC 61000-4-2: 2008	B	PASS
Radio-frequency, Continuous radiated disturbance	IEC 61000-4-3:2006 +A1:2007+A2:2010	A	PASS
Electrical fast transient (EFT)	IEC 61000-4-4:2012	B	N/A
Surge (Input a.c. power ports)	IEC 61000-4-5: 2005	B	N/A
Surge (Telecommunication ports)		B	N/A
Radio-frequency, Continuous conducted disturbance	IEC 61000-4-6: 2008	A	N/A
Voltage dips, >95% reduction	IEC 61000-4-11: 2004	B	N/A
Voltage dips, 30% reduction		B	N/A
Voltage interruptions		C	N/A
N/A is an abbreviation for Not Applicable.			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

#### CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

## 5 TEST CONDITIONS AND RESULTS

### 5.1 Radiated disturbance (electric field)

For test instruments and accessories used see section 6 part 6.1.

#### 5.1.1 Description of the test location

Test location : Semi-Anechoic chamber


Test disturbance: 3 Meter

#### 5.1.2 Description of the test set-up

##### 5.1.2.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

##### 5.1.2.2 Block Diagram of Test Setup

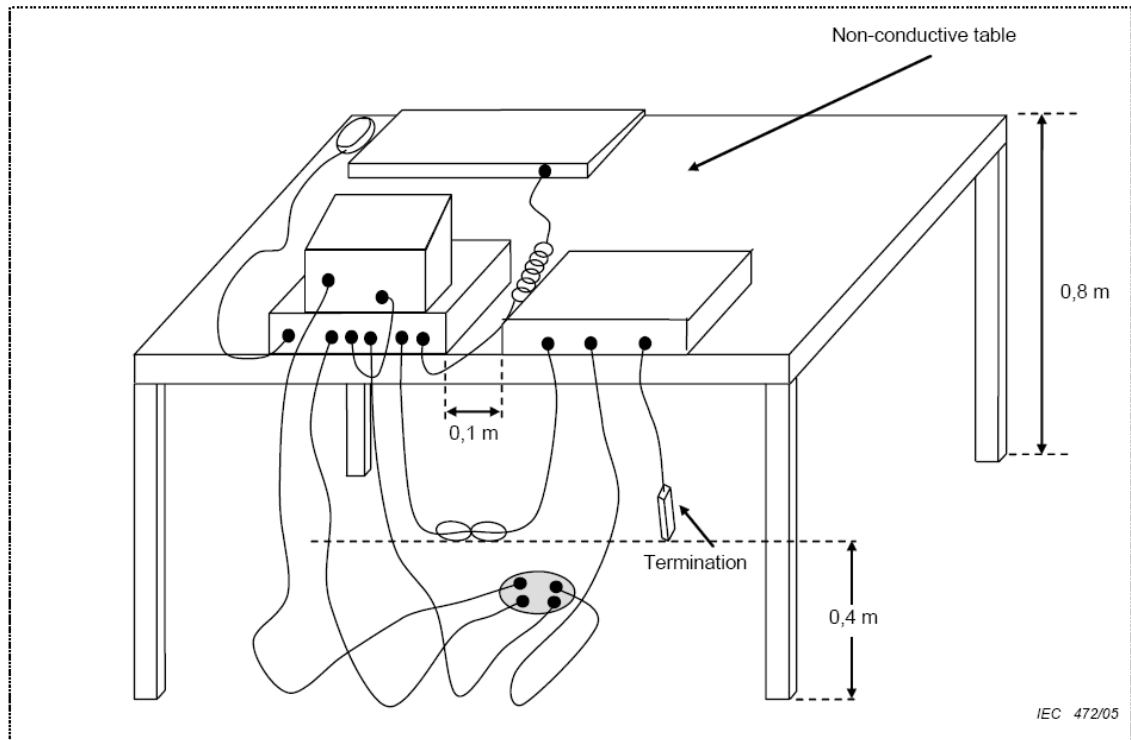

#### 5.1.3 Limits of disturbance (Class B)

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB $\mu$ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

(2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

#### CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

**5.1.4 Test result**


The requirements are	<b>Fulfilled</b>
Band width	120kHz
Frequency range	30 MHz - 6000 MHz
Min. limit margin	>5.68 dB at 30 - 6000 MHz

**Remarks:** The limits are kept. For detailed results, please see the following page(s).

5.1.5 Test protocol

Test point:	Horizontal	Result:	<input checked="" type="checkbox"/> - passed
Operation mode	Normal		<input type="checkbox"/> - not passed
Remarks:			

EUT	Wall Mount Remote
MODEL NO.	WMTX
Operating Condition	Battery 3V
Test Condition	Ambient Temperature: 24°C Humidity: 56%
Operator	Eric

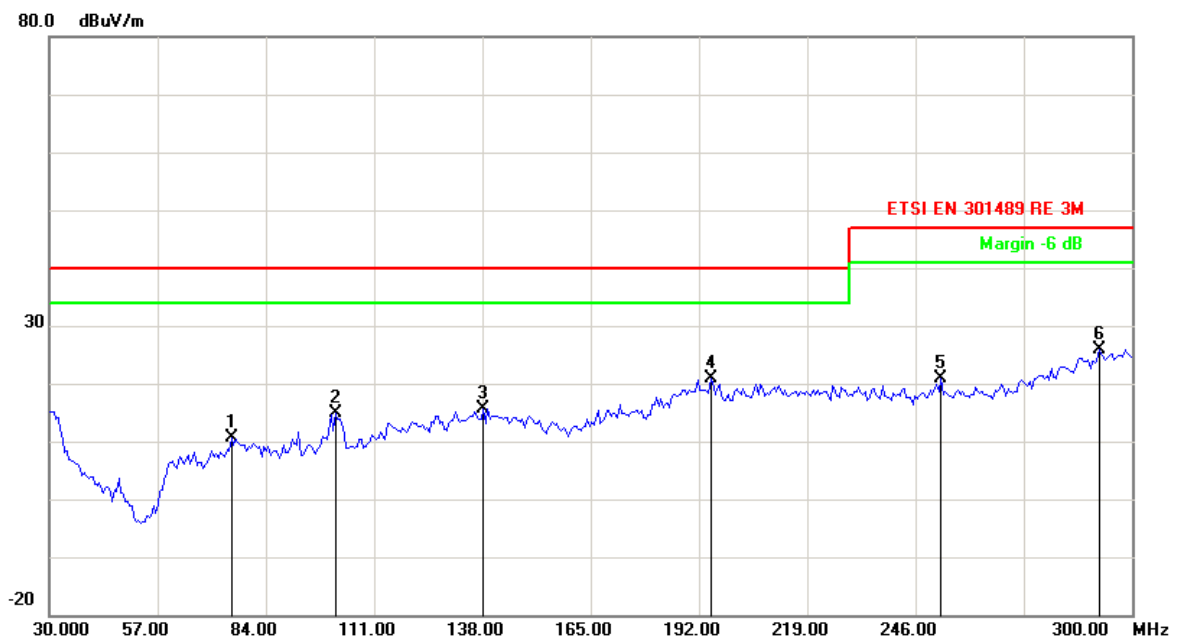

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	75.4509	-21.45	31.97	10.52	40.00	-29.48	QP
2	101.4228	-22.78	37.65	14.87	40.00	-25.13	QP
3	138.2164	-16.50	32.20	15.70	40.00	-24.30	QP
4	195.0301	-12.34	33.28	20.94	40.00	-19.06	QP
5	252.3848	-12.73	33.51	20.78	47.00	-26.22	QP
6	291.8838	-6.78	32.78	26.00	47.00	-21.00	QP

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

**CTS (Ningbo) Testing Service Technology Co., Ltd.**

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China


Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

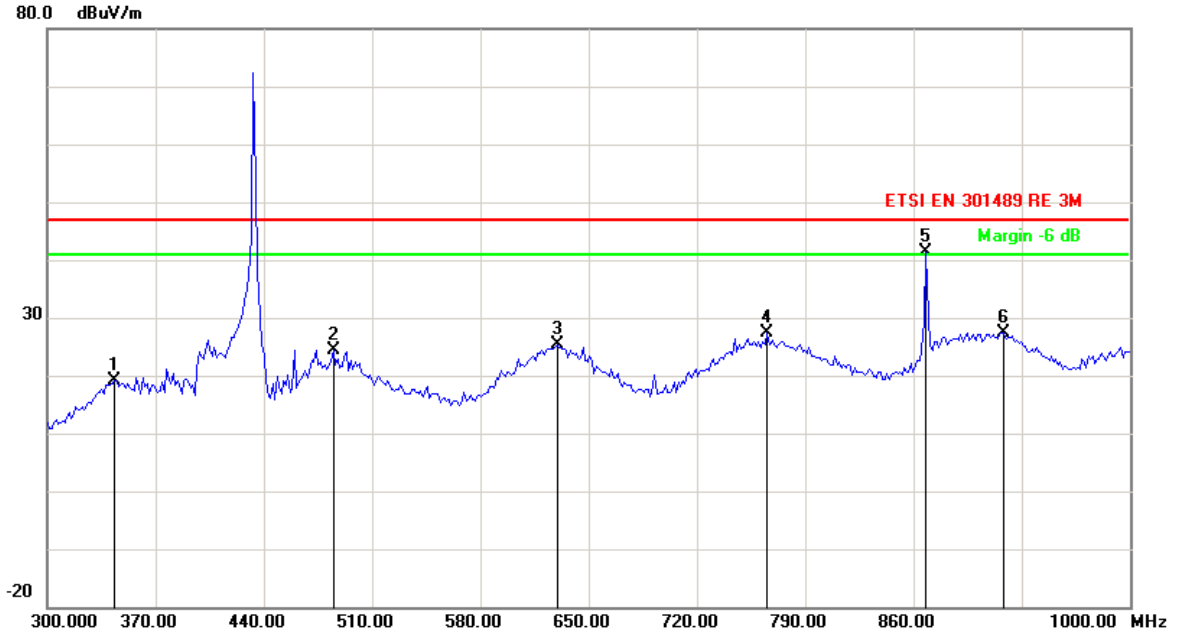

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	343.4869	-13.25	32.27	19.02	47.00	-27.98	QP
2	485.1703	-9.81	34.30	24.49	47.00	-22.51	QP
3	629.6593	-7.33	32.67	25.34	47.00	-21.66	QP
4	765.7314	-5.62	32.95	27.33	47.00	-19.67	QP
5	868.1362	-7.54	48.86	41.32	47.00	-5.68	QP
6	918.6372	-4.48	31.78	27.30	47.00	-19.70	QP

Above 1G

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1521.042	-1.37	40.89	39.52	70.00	-30.48	peak
2	1521.042	-1.37	31.62	30.25	50.00	-19.75	AVG
3	1731.463	-1.27	48.70	47.43	70.00	-22.57	peak
4	1731.463	-1.27	37.75	36.48	50.00	-13.52	AVG
5	2603.206	4.35	48.78	53.13	70.00	-16.87	peak
6	2603.206	4.35	37.81	42.16	50.00	-7.84	AVG
7	3254.509	7.42	42.42	49.84	74.00	-24.16	peak
8	3254.509	7.42	31.34	38.76	54.00	-15.24	AVG
9	3725.451	8.93	41.40	50.33	74.00	-23.67	peak
10	3725.451	8.93	31.33	40.26	54.00	-13.74	AVG
11	4096.192	10.04	38.90	48.94	74.00	-25.06	peak
12	4096.192	10.04	27.22	37.26	54.00	-16.74	AVG

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

**CTS (Ningbo) Testing Service Technology Co., Ltd.**


2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)  
Complaint line: +86-20-85533471

Fax: +86-20-38780406  
E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Test point:	Vertical	Result:	<input checked="" type="checkbox"/> - passed
Operation mode:	Normal		<input type="checkbox"/> - not passed
Remarks:			

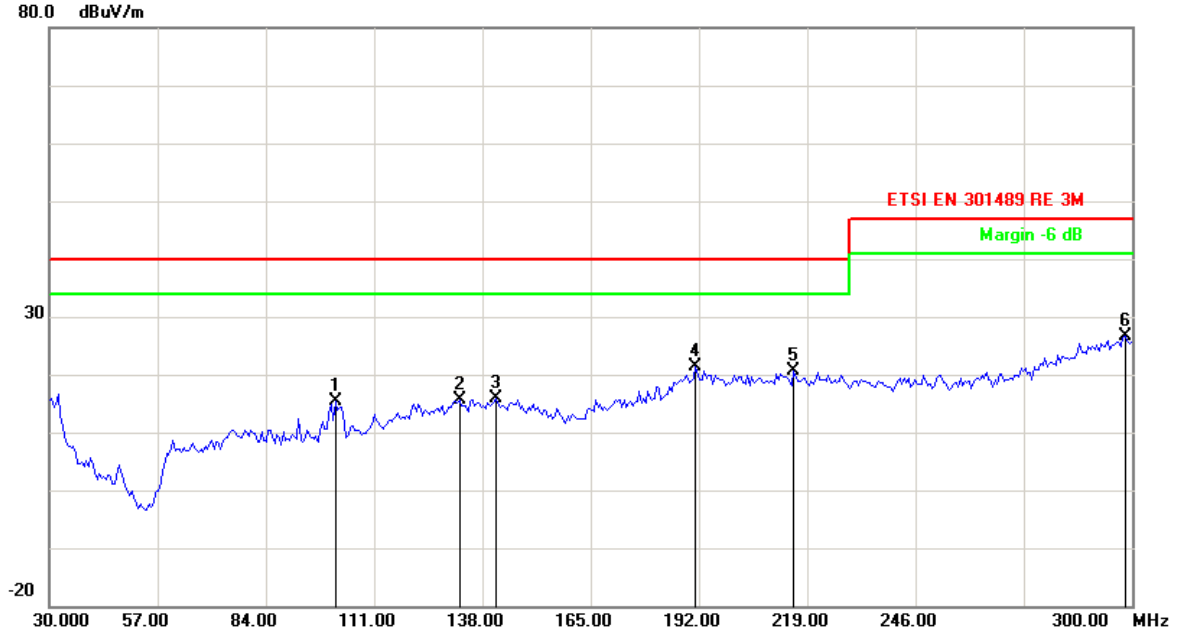

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	101.4228	-22.78	38.05	15.27	40.00	-24.73	QP
2	132.2645	-16.91	32.42	15.51	40.00	-24.49	QP
3	141.4629	-16.52	32.46	15.94	40.00	-24.06	QP
4	191.2425	-12.09	33.42	21.33	40.00	-18.67	QP
5	215.5912	-12.27	32.94	20.67	40.00	-19.33	QP
6	298.3768	-5.81	32.53	26.72	47.00	-20.28	QP

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

**CTS (Ningbo) Testing Service Technology Co., Ltd.**

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China


Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

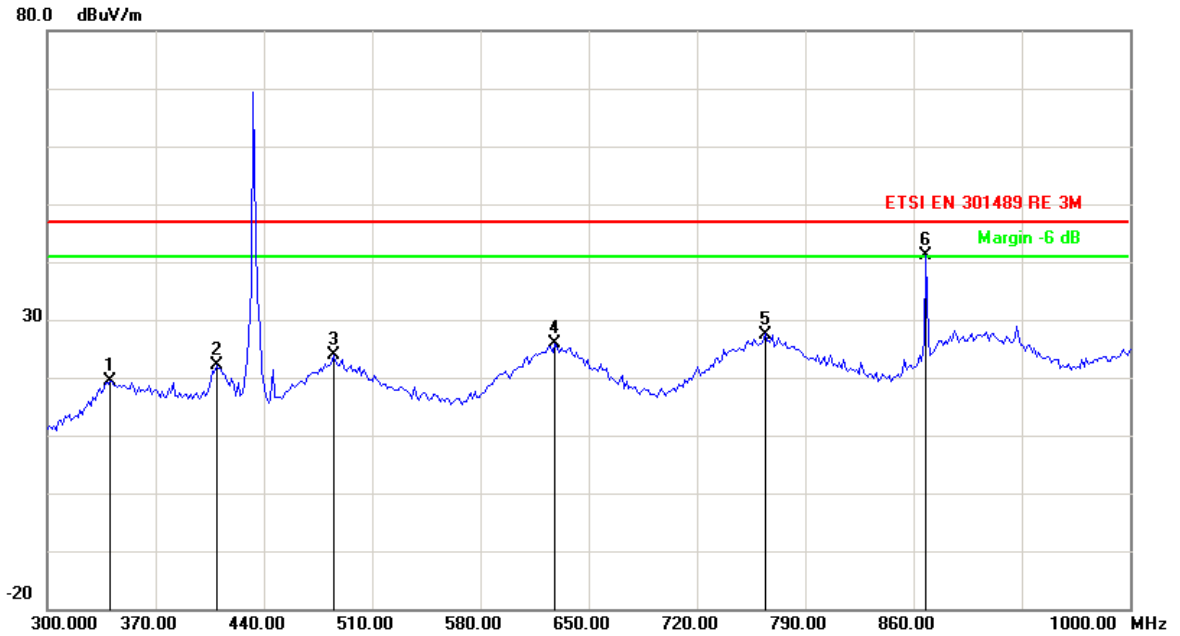

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	340.6813	-13.14	32.63	19.49	47.00	-27.51	QP
2	409.4188	-14.91	36.99	22.08	47.00	-24.92	QP
3	485.1703	-9.81	33.69	23.88	47.00	-23.12	QP
4	628.2565	-7.29	33.06	25.77	47.00	-21.23	QP
5	764.3286	-5.59	33.09	27.50	47.00	-19.50	QP
6	868.1362	-7.54	48.55	41.01	47.00	-5.99	QP

Above 1G

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1731.463	-1.27	45.12	43.85	70.00	-26.15	peak
2	1731.463	-1.27	34.75	33.48	50.00	-16.52	AVG
3	2823.647	5.60	43.71	49.31	70.00	-20.69	peak
4	2823.647	5.60	32.26	37.86	50.00	-12.14	AVG
5	3034.068	6.71	47.92	54.63	74.00	-19.37	peak
6	3034.068	6.71	36.57	43.28	54.00	-10.72	AVG
7	3474.950	8.12	44.23	52.35	74.00	-21.65	peak
8	3474.950	8.12	32.94	41.06	54.00	-12.94	AVG
9	4076.152	9.99	39.93	49.92	74.00	-24.08	peak
10	4076.152	9.99	27.69	37.68	54.00	-16.32	AVG
11	4777.555	11.64	42.06	53.70	74.00	-20.30	peak
12	4777.555	11.64	29.64	41.28	54.00	-12.72	AVG

Note: Level=Reading+Factor. Margin= Limit-Level

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

**CTS (Ningbo) Testing Service Technology Co., Ltd.**

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

## 5.2 Electrostatic discharge

For test instruments and accessories used see section 6 part 6.2.

### 5.2.1 Description of the test location

Test location :	Test location no. 2
Power supply:	Battery 3V
Test condition:	Ambient Temperature: 24°C, Humidity:56%
Date of test :	09~10 October 2013
Operator :	<b>Eric</b>

### 5.2.2 Severity of levels electrostatic discharge

5.2.1.1 Severity level: Contact discharge at  $\pm 4\text{KV}$  air discharge at  $\pm 8\text{KV}$

Level	Test Voltage Contact Discharge (kV)	Test Voltage Air Discharge (kV)
1	2	2
2	4	4
3	6	8
4	8	15
X	Special	Special


5.2.1.2 Performance criterion: B

### 5.2.3 Description of the test set-up

5.2.3.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

5.2.3.2 Block Diagram of Test Setup

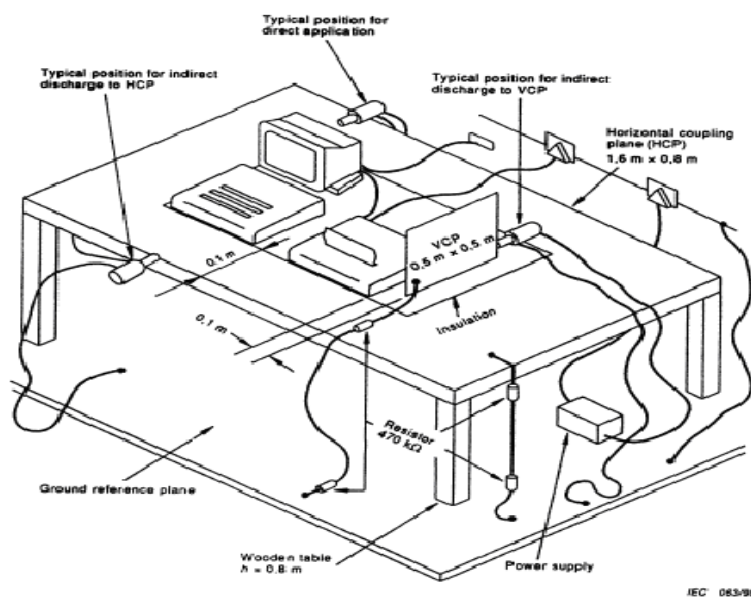

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

#### CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



## 5.2.4 Test specification:

Contact discharge voltage:	<input type="checkbox"/> 2 kV	<input type="checkbox"/> 4 kV	
Air discharge voltage:	<input type="checkbox"/> 2 kV	<input type="checkbox"/> 4 kV	<input type="checkbox"/> 8 kV
Discharge impedance:	<input type="checkbox"/> 330 $\Omega$ / 150 pF		
Discharge factor:	<input type="checkbox"/> $\geq 1$ sec.		
Number of discharges:	<input type="checkbox"/> $\geq 10$		
Type of discharge:	Direct discharge	<input type="checkbox"/> Air discharge	
		<input type="checkbox"/> Contact discharge	
	Indirect discharge	<input type="checkbox"/> Contact discharge	
Polarity:	<input type="checkbox"/> Positive	<input type="checkbox"/> Negative	
Discharge location:	<input type="checkbox"/> see photo documentation of the test set-up		
	<input type="checkbox"/> all external locations accessible by hand		
	<input type="checkbox"/> horizontal plate (HCP)		
	<input type="checkbox"/> vertical coupling plate (VCP)		

## 5.2.5 Test result

The requirements are **Fulfilled**Performance Criterion: **B****Remarks:** During the test no deviation was detected to the selected operation mode(s).

### 5.3 Radiated, radio-frequency, electromagnetic field

For test instruments and accessories used see section 6 part 6.3.

#### 5.3.1 Description of the test location

Test location :	GTEM chamber
Power supply:	Battery 3V
Test condition:	Ambient Temperature: 24°C, Humidity:56%
Date of test :	09~10 October 2013
Operator :	<b>Eric</b>

#### 5.3.2 Severity levels of radiated, Radio-frequency, electromagnetic field

##### 5.3.2.1 Severity level: 3V/m

Level	Field strenght(V/m)
1	1
2	3
3	10
X	Special


##### 5.3.2.2 Performance criterion: A

#### 5.3.3 Description of the test set-up

##### 5.3.3.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

##### 5.3.3.2 Block Diagram of Test Setup

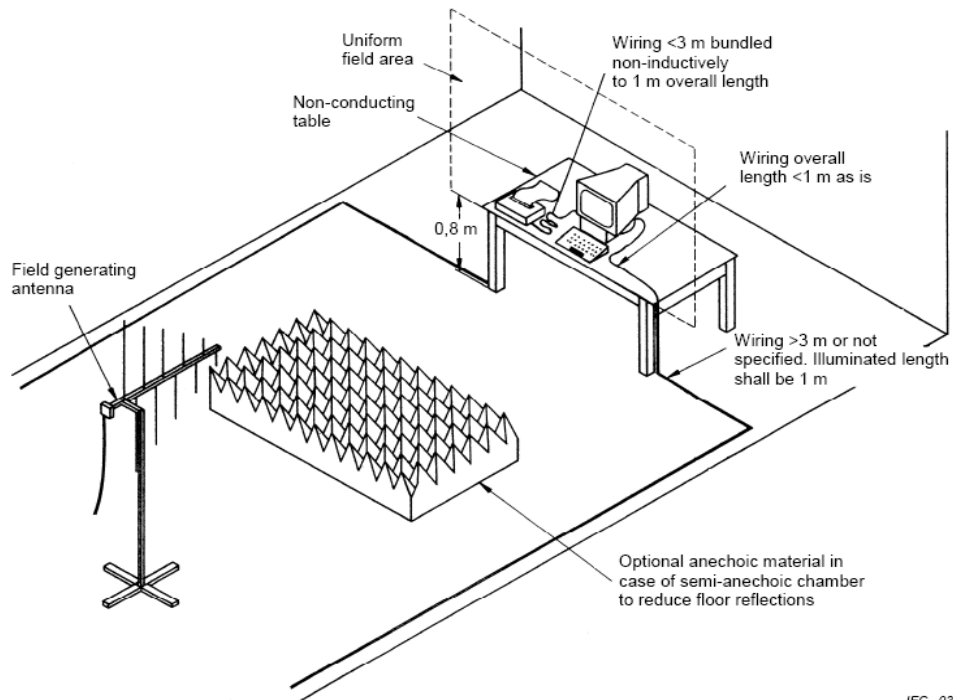

IEC 034/06

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

#### CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

### 5.3.4 Test specification:

Frequency range:	<input checked="" type="checkbox"/> 80 MHz to 1000 MHz <input checked="" type="checkbox"/> 1400MHz to 2700 MHz
Field strength:	<input checked="" type="checkbox"/> 3 V/m
EUT - antenna separation:	<input checked="" type="checkbox"/> 3 m
Modulation:	<input checked="" type="checkbox"/> AM: 80 % <input checked="" type="checkbox"/> sinusoidal 1000Hz
Frequency step:	<input checked="" type="checkbox"/> 1 % with 3 s dwell time
Antenna polarisation:	<input checked="" type="checkbox"/> horizontal <input checked="" type="checkbox"/> vertical

### 5.3.5 Test result

The requirements are **Fulfilled**

Performance Criterion: **A**

**Remarks:** During the test no deviation was detected to the selected operation mode(s).

## 6 USED TEST EQUIPMENT

6.1					
Radiated disturbance (Electric field)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2013/03/28
2	EMI Test Receiver	ROHDE & SCHWARZ	ESVS 10	842885/001	2012/11/06
3	Biconical Antenna	ROHDE & SCHWARZ	HK116	100221	2013/03/29
4	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2013/03/29
5	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2013/03/29
6	Pre-Amplifier	EMC	EMC330	980113	2013/03/28
7	Pre-Amplifier	EMC	EMC012645	980114	2013/03/28
8	EMI Test Software	Farad	EZ-EMC	N/A	N/A

6.2					
Electrostatic Discharge					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ESD Simulator	Schlöder	SESD 200	0302016	2013/03/29

6.3					
RF Field Strength Susceptibility					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Signal Generator	ROHDE & SCHWARZ	SMY 01	843215/014	2012/11/06
2	Signal Generator	ROHDE & SCHWARZ	SML03	102986	2012/11/06
3	Amplifier	KALMUS	713FC	7385-1	2012/11/06
4	Power Meter	ROHDE & SCHWARZ	NRVS	842856/049	2012/11/06
5	Field Probe	ETS	HI-6005	00075047	2012/11/14
6	RS Test Software	Farad	EZ-RS	N/A	N/A

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

### CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service

## 7 TEST PHOTOGRAPHS

### 7.1. Photo of radiated emission measurement (R.E. Electric field)

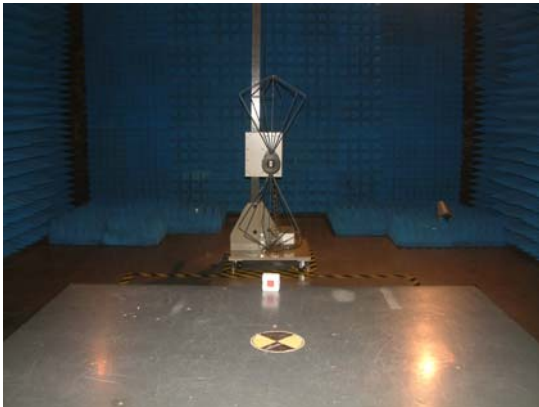


RE Below 1GHz

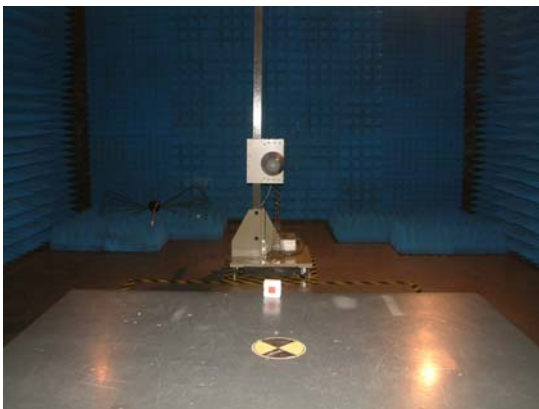

RE Above 1GHz

### 7.2. Photo of electrostatic discharge Immunity measurement (E.S.D.)

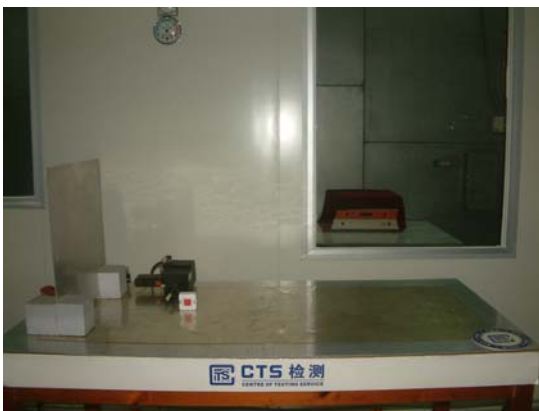

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

#### CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)


Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: [cts@cts-lab.com.cn](mailto:cts@cts-lab.com.cn)

See Reverse For Terms And Conditions of Service

7.3. Photo of RF field strength Immunity measurement (R.S.)

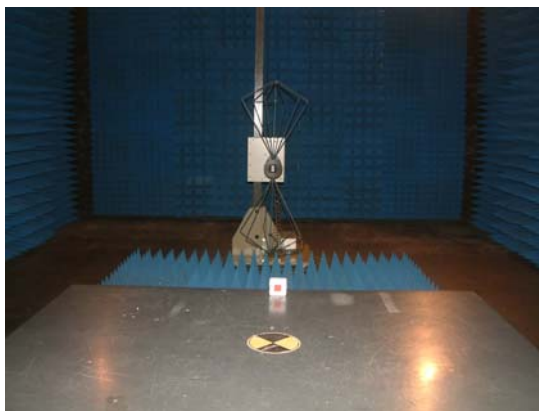

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

**CTS (Ningbo) Testing Service Technology Co., Ltd.**

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: [cts@cts-lab.com.cn](mailto:cts@cts-lab.com.cn)

See Reverse For Terms And Conditions of Service

## 8 External and Internal Photos of the EUT



External view 1



External view 2



External view 3

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

**CTS (Ningbo) Testing Service Technology Co., Ltd.**

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: [cts@cts-lab.com.cn](mailto:cts@cts-lab.com.cn)

See Reverse For Terms And Conditions of Service



**External view 4**



**External view 5**



**External view 6**

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

**CTS (Ningbo) Testing Service Technology Co., Ltd.**

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471


E-mail: [cts@cts-lab.com.cn](mailto:cts@cts-lab.com.cn)

See Reverse For Terms And Conditions of Service






Internal view

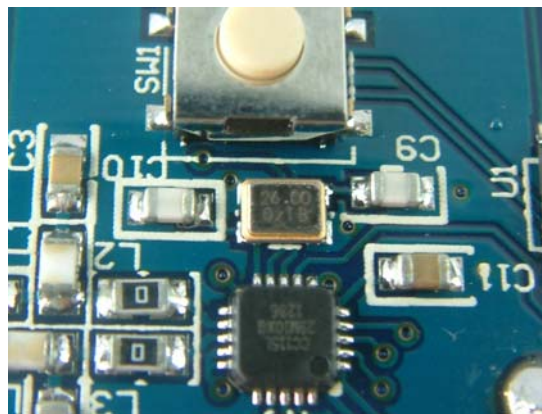

Oscillator

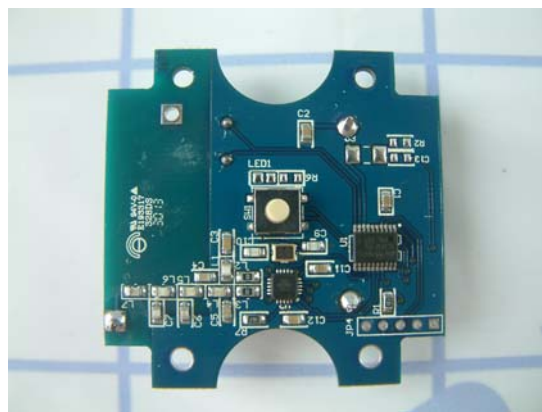

PCB view 1

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

**CTS (Ningbo) Testing Service Technology Co., Ltd.**

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)  
Complaint line: +86-20-85533471

Fax: +86-20-38780406  
E-mail: [cts@cts-lab.com.cn](mailto:cts@cts-lab.com.cn)

See Reverse For Terms And Conditions of Service



PCB view 2

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

**CTS (Ningbo) Testing Service Technology Co., Ltd.**

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)  
Complaint line: +86-20-85533471

Fax: +86-20-38780406  
E-mail: [cts@cts-lab.com.cn](mailto:cts@cts-lab.com.cn)

See Reverse For Terms And Conditions of Service

## 9 Manufacturer/ Approval holder Declaration

The following identical model(s):

N/A

Belong to the tested device:

Product description: **Wall Mount Remote**  
Model name: **WMTX**