

## Applications

- Hospital nurse call bed point
- Frail care nurse call


## Features

- Code-Hopping Encryption
- Audible Piezo output
- Retransmits every 30sec if not reset
- AA Battery powered or 12VDC
- 150,000 Activations on set of AA batteries
- Wall mountable or Flush mountable

## Certifications

- ETSI EN300 220-V2.4.1
- ETSI EN301-489-3 V1.4.1
- ETSI EN301-489-1 V1.9.2
- IEC 60950-1:2005 + A1:2009
- ICASA: TA-2017/3310

Description	Order Code
Nursecall Station	NURSECALL
Nursecall Transmitter	NURSECALL_TX
Overhead Door light	DOORLIGHT
Thumbswitch 1.8m	THUMBSWITCH

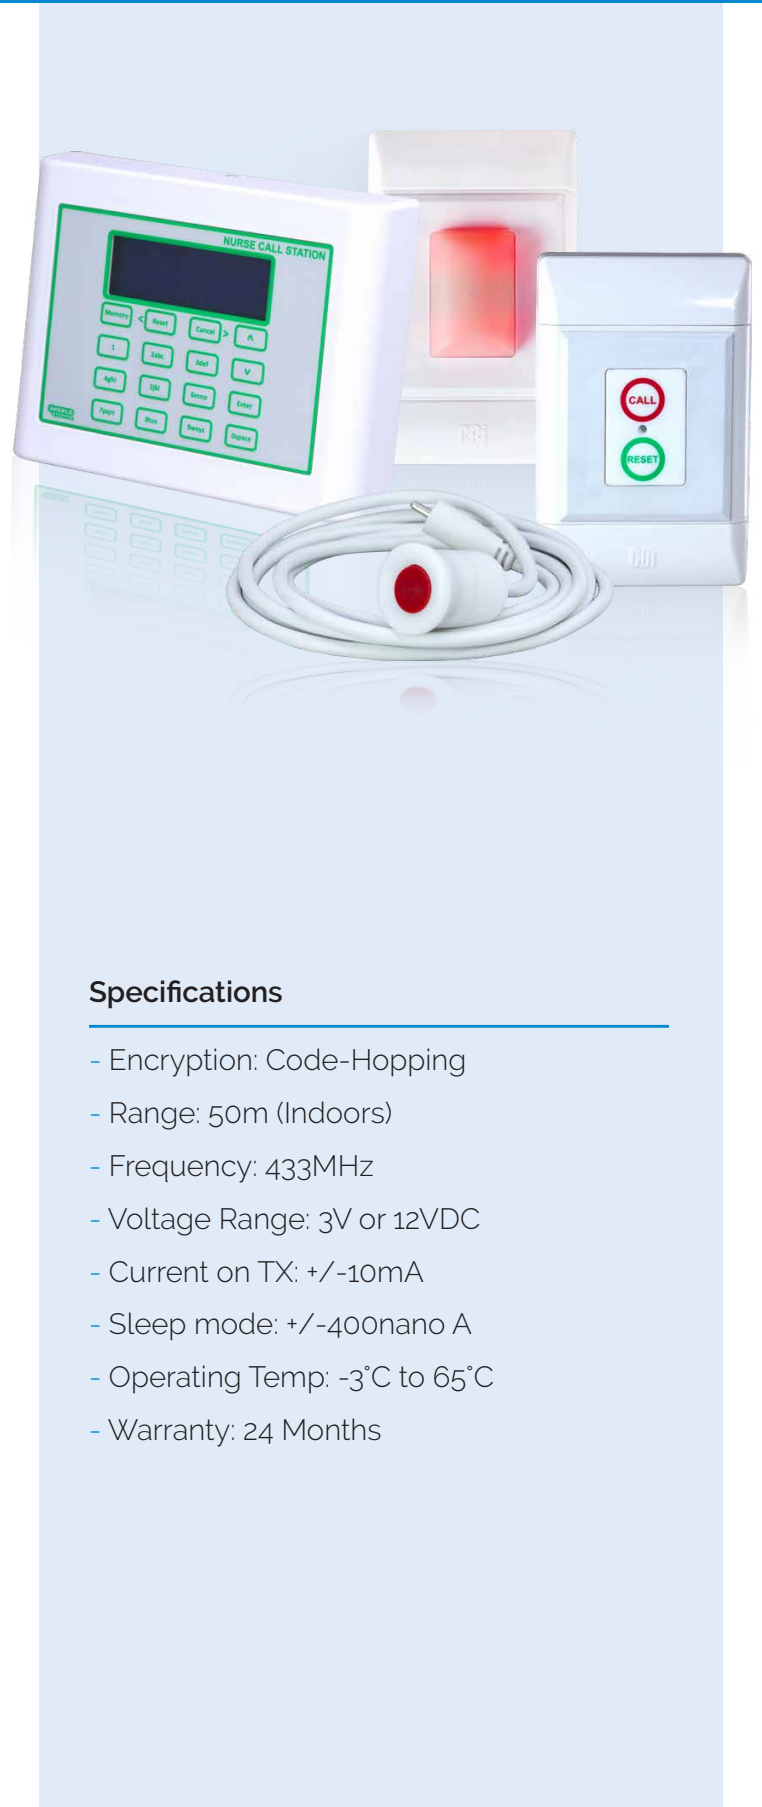

## Specifications

- Encryption: Code-Hopping
- Range: 50m (Indoors)
- Frequency: 433MHz
- Voltage Range: 3V or 12VDC
- Current on TX: +/-10mA
- Sleep mode: +/-400nano A
- Operating Temp: -3°C to 65°C
- Warranty: 24 Months