


# PASSIVE iR TRANSMITTER

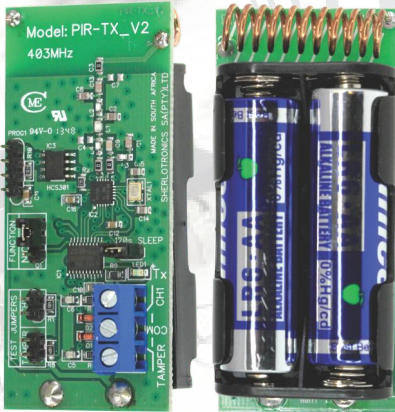

## Applications

Transmission of battery powered PIR's  
Transmission of magnetic door contacts  
Emergency break glass boxes  
Roller shutter door contacts

## Features

Alarm and Tamper transmit outputs (2 Channels)

Powered by 2 x Low cost AA Alkaline batteries

Battery life under normal conditions 3 years or

150 000 triggers

Selectable options for:-

- 120second Sleep mode on/off
- Normally Open or Normally Closed

## Specification:

Encryption:	Code-Hopping
Range:	500m (Open air)
Frequency:	403MHz
Voltage Range:	2.2V to 4.5V DC
Current on TX:	+/-14mA
Sleep mode:	+/-400nano A
Dimensions:(lxbxh)	71x31x28mm
Gross Weight:	74 grams
Operating Temp:	-3°C to 65°C
Warranty:	24 Months

The new improved model is easier to install  
& has up to 3 times longer battery life and a  
120 second sleep mode function

## Order Code

PIR Transmitter + 2x AA batteries	<b>PIR_TX.V2</b>
AA Alkaline battery 1.5V	<b>AA</b>